

Stain Varnish

Product properties

Black lacquer stain for combined colouring and varnishing of wood. Provides a very robust and durable surface. Natural Wood Stain Varnish is available in both matt and semi-gloss.

- Colouring of wood
- Robust surface
- Matt or semi-gloss

Product use

For indoor use on e.g. tabletops, furniture and other wooden inventory. Not suitable for use on lacquered surfaces or floors.

Substrate

Must be clean, dry, solid and suitable for surface treatment. The surface must be free of old paint or varnish residues.

Treatment

Uneven or loose varnish and paint are completely removed to clean wood by sanding. Remove dirt, grime, grease and chalking materials with Natural Wood Cleaner. Sand previously varnished surfaces matt, avoid sanding through. Wipe dry with a hard-wrung cloth. It is important for a good result that there is no dust on the surface when varnishing. Apply 2 coats of lacquer stain 24 hours apart. Always carry out a test treatment to verify and accept the adhesion and result.

Application


Brush or roller.
Stir before and during use.
Apply in an even layer along the length of the wood, avoiding overlaps that can cause discolouration. Sand lightly between each application. Grain size 120-180.
Condensation during drying / curing must not form.

Expected result

Colored surface which appears saturated and uniform in gloss and finish. The durability of the surface depends on wood quality, construction, application and exposure.

Cleaning and maintenance

Clean the surface as needed with universal cleaner or equivalent. Before the varnish is worn through, the surface should be recoated with Natural Wood Stain Varnish. Before recoating, wash with Natural Wood Cleaner.

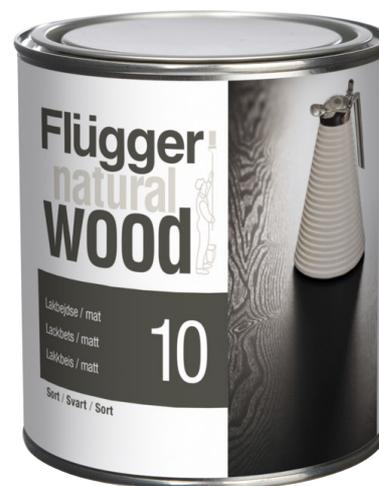

Please note!

Oil-saturated rags can self-ignite.
Saturate with water or destroy.

Environmental information

Minimise paint waste by calculating in advance how much paint to use.
Remove as much paint as possible from tools before cleaning.
Paint and cleaning fluid must not be poured down drains, but collected and disposed of as environmental waste.
Empty and dry packaging should be sorted as metal.

Storage

Cool, frost free and tightly closed

Protection equipment

Protect skin and eyes from splashes with suitable clothing, gloves and glasses.
Avoid inhalation of spray mist and grinding dust.
Wear suitable protective equipment, see safety data sheet for further information.

Technical Data

Gloss	Matte;Semi Gloss
Density (kgs/l)	0.90
Solids Weight %	45
Nominal spreading rate (m ² /ltr.)	10
Min. working temp. during application and drying/curing	Min. +15°C
Humidity	Max. humidity 80 % RH.
Drying time at 20° C, 60 % RH (Hours)	12
Recoatable at 20° C, 60 % RH (Hours)	24
Fully cured at 20° C, 60 % RH (Days)	28
Dilution	Do not dilute
Cleaning of Tools etc.	White spirit and brush cleaner
Country of Origin	Denmark

Current TDS Version

December 2024

Replaces TDS Version

March 2024